

Resisto fixed output


Resisto 1200 IP66 5000lm 840

0010211



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 36W; 140lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1200mm x 89mm x 88mm; D-mark.

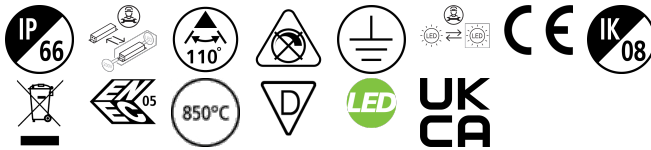

NOTES

undefined

PRODUCT OVERVIEW

Product name	Resisto 1200 IP66 5000lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
E-number FI	4357043
Warranty	5 years
Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	< 24
Photobiological Risk Group	RG1
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP66
IK rating	IK08
Product EAN number	5410288102115
Dimming method	N/A

Resisto fixed output

Resisto 1200 IP66 5000lm 840
0010211

DATA TABLE

General data

Product name	Resisto 1200 IP66 5000lm 840
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4357043
Warranty	5 years

Optical data

Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Correlated colour temperature range (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 24
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	36
Mains voltage (V)	220-240V
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	5.5
Inrush Duration (µs)	20
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	41

Resisto fixed output

Resisto 1200 IP66 5000lm 840

0010211

Max. Luminaires per 13A C Breaker	53
Max. Luminaires per 16A C Breaker	65
Max. Luminaires per 20A C Breaker	82
Max. Luminaires per 10A B Breaker	41
Max. Luminaires per 13A B Breaker	53
Max. Luminaires per 16A B Breaker	65
Max. Luminaires per 20A B Breaker	82

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	1.32

Packaging


Single packaging type	Carton
Product EAN number	5410288102115
Packaging single length / height (cm)	120.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (outer)	15410288102112
Units per outer package	6
Packaging outer length / height (cm)	126.8
Packaging outer width (cm)	33.5
Packaging outer depth (cm)	20.1

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

Resisto fixed output Resisto 1200 IP66 5000lm 840 0010211

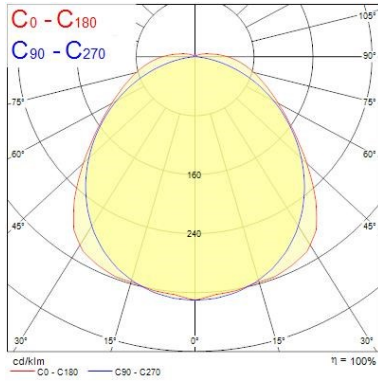

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	1.32	0.5	0.5	6671
	1.35	0.5	0.5	737
		0.5	0.5	708
1.0	2.63	1.0	1.0	1668
	2.69	1.0	1.0	184
		1.0	1.0	177
1.5	3.95	1.5	1.5	741
	4.04	1.5	1.5	82
		1.5	1.5	79
2.0	5.27	2.0	2.0	417
	5.39	2.0	2.0	46
		2.0	2.0	44
2.5	6.59	2.5	2.5	267
	6.73	2.5	2.5	29
		2.5	2.5	28
3.0	7.90	3.0	3.0	188
	8.08	3.0	3.0	20
		3.0	3.0	20

TECHNICAL DRAWINGS

